

2 hr in a Wall, 1 hr in a Ceiling

# 2HR FIRE RATED METAL ACCESS PANEL



## TECHNICAL SPECIFICATION

<b>DESCRIPTION</b>	Metal Door - picture frame
<b>FIRE RATED</b>	1 or 2 hour fire resistance for integrity to BSEN 1634-1:2008 and BSEN 1363-1:1988
<b>HINGED TYPE</b>	Continuous Hinge
<b>COMPOSITION</b>	Removable flush metal faced door. 1.2mm thick zintec steel frame and door tray. Polyester powder coated in matt white RAL 9010 20% gloss
<b>FRAME TYPE</b>	25mm picture frame for retrofit.
<b>FITTING</b>	Screw fix through the frame into a suitable trimming.
<b>LOCKING</b>	3-way locking system


## DIMENSIONS

On installation the structural opening to fit the panel must be 5 mm larger than the panel size.

SIZES		STRUCTURAL OPENING		CLEAR OPENING with door removed	
(X)	(Y)	(X)	(Y)	(X)	(Y)
300	300	305	305	276	276
450	450	450	455	426	426
550	550	550	555	526	526
600	600	600	605	676	576
600	900	600	905	676	876
600	1200	600	1205	676	1176

Bespoke sizes are also available

## LOCKING OPTIONS

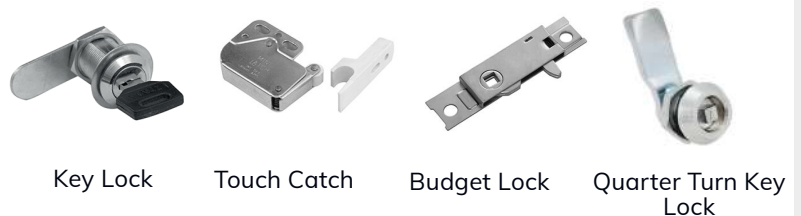

## TECHNICAL DRAWING

