
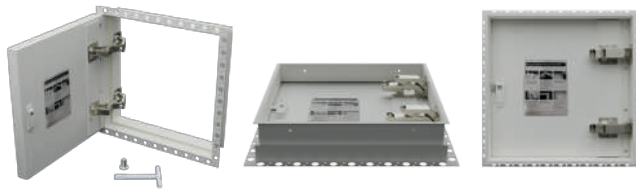


Plasterboard Face with Concealed Beaded Frame

# CEILING/WALL ACCESS PANEL

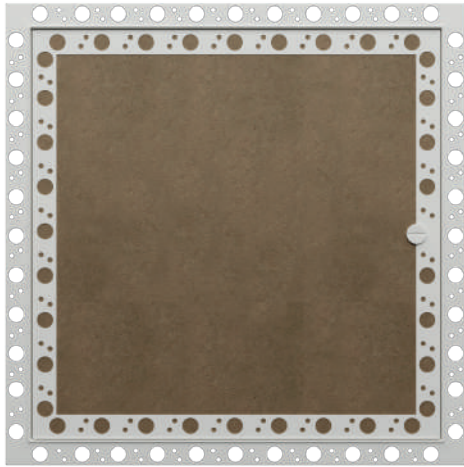

## TECHNICAL SPECIFICATION

DESCRIPTION	Plasterboard Faced - Concealed Beaded Frame
FIRE RATED	Non Fire - Rated, made from wholly non-combustible materials
HINGED TYPE	Panel Hinge.
COMPOSITION	Flush Plasterboard infill Faced Door. 1.2mm Thick Zintec Steel Perforated Frame. 1.0mm Thick Zintec Steel Door Tray with Plasterboard Infill. Polyester Powder Coated in matt white RAL 9010 20% gloss.
FRAME TYPE	Concealed Frame for taping and skimming on site
FITTING	Screw fix through the frame into a suitable trimming.
LOCKING	Budget Lock


## DIMENSIONS

On installation the structural opening to fit the panel must be 5 mm larger than the panel size.

SIZES		STRUCTURAL OPENING		CLEAR OPENING with door removed	
(X)	(Y)	(X)	(Y)	(X)	(Y)
300	300	305	305	270	270
450	450	455	455	420	420
550	550	555	555	520	520
600	600	605	605	570	576
600	900	605	905	570	870
600	1200	605	1205	570	1170

Bespoke sizes are also available

## LOCKING OPTIONS

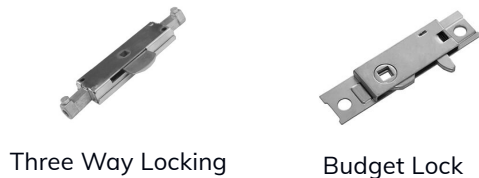

Three Way Locking

Budget Lock

## TECHNICAL DRAWING

